



Caution!! After FG falcon key programming is performed, you must then complete [Parameter reset]!!

Caution!! Before Parameter Reset can be performed, the Erase and Program key function must be completed.


1. Select the FG falcon>BEM

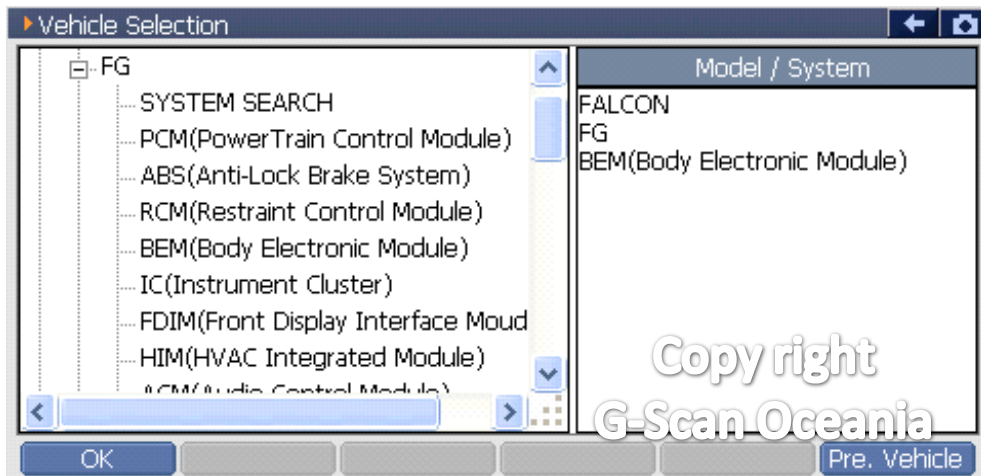


2. Select special function

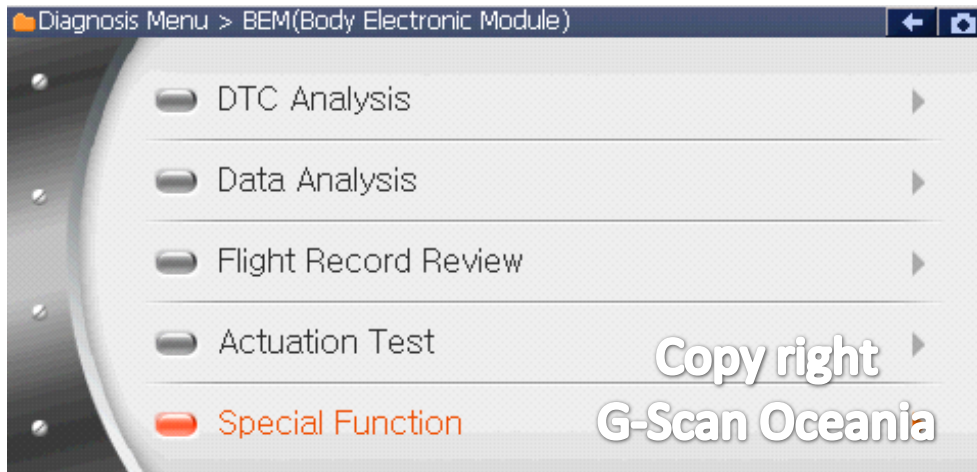


3. Select Parameter reset.

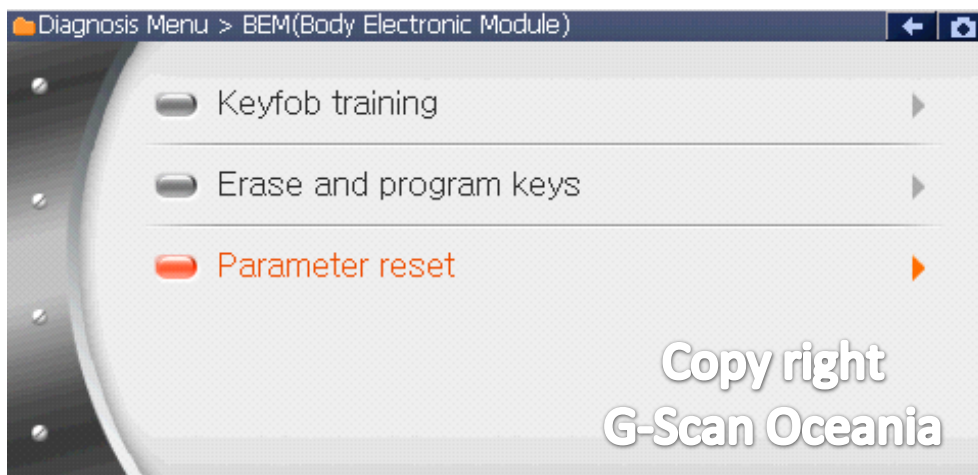


4. Notice.

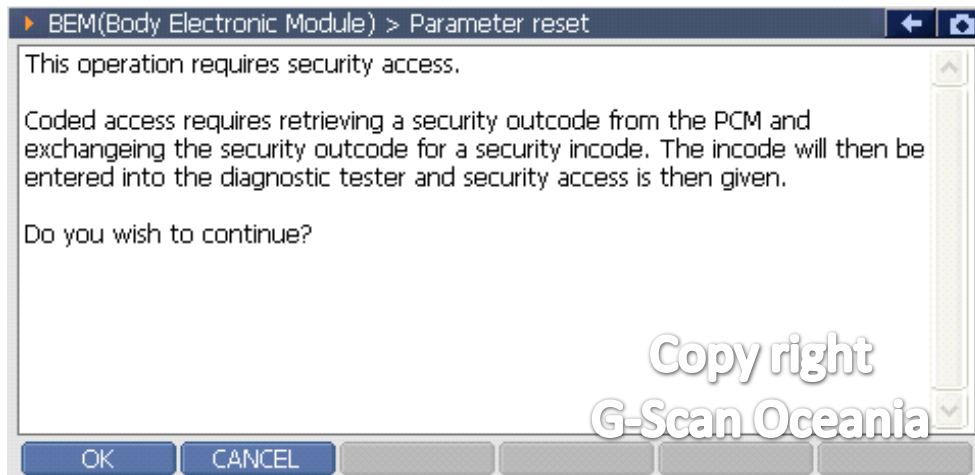

5. Confirm the VIN number

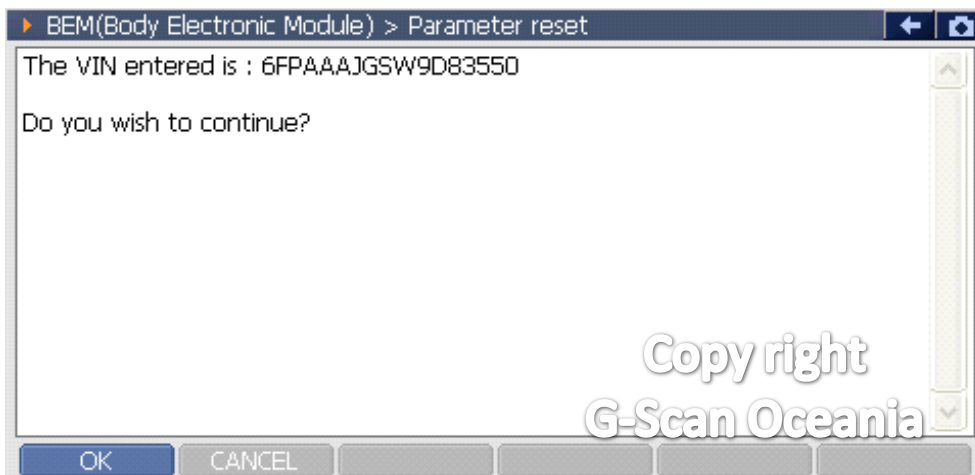


6. The G scan will display the Outcode.

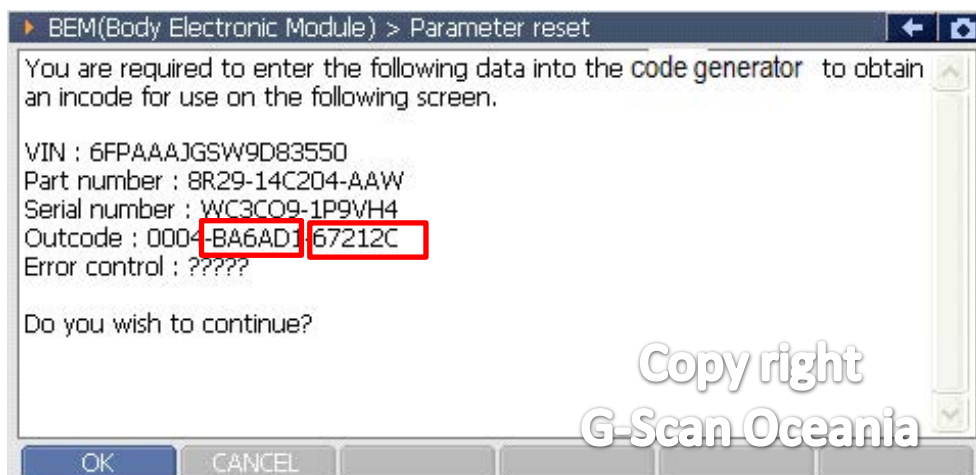

[BA6AD1(This sample can be used to generate the first 4 digits of the incode)],
and the Second 6 digits
[67212C(This sample can be used to generate the last four digits of the incode)].

7. Input the code

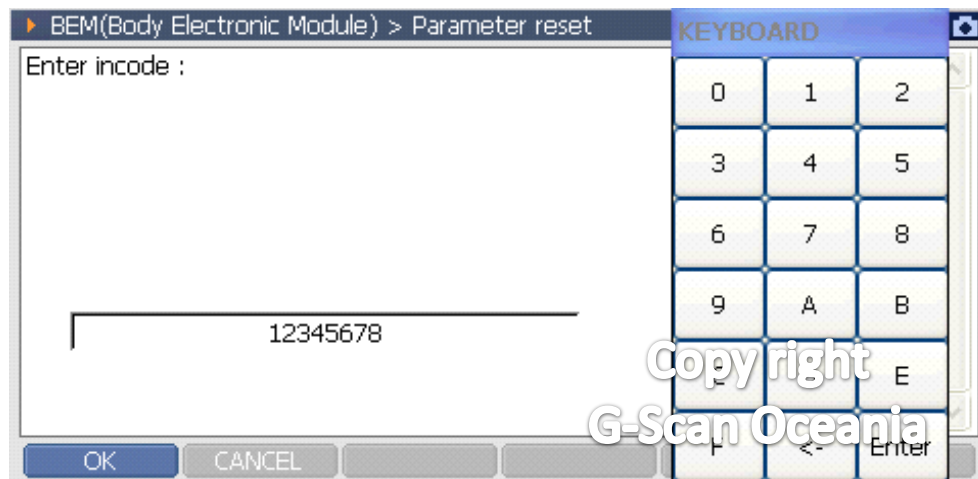

** After this step, follow the G-scan's instruction to complete the procedure.