

1. Select correct Mazda6 engine.



1. Check engine lamp is on.
2. Engine has DTC's referring to [DPF(PM) Accumulator over value].

PCM(Engine) > Data Analysis(Select Item)


Item name	Value	Unit
PM Accumulation Amount(g/l)	11.18	
PM Accumulation Amount Desired(g/l)	11.18	
PM Generation Amount(g/l)	11.18	

Function All Items Graph Record Select Item


1. Check [Data Analysis] referring to [PM accumulation amount] values.
2. Normal status might be less than 0~7.
2. If more than 8~10, the engine must have DTCs referring to [DPF(PM) accumulation value].



1. Select [Special function].

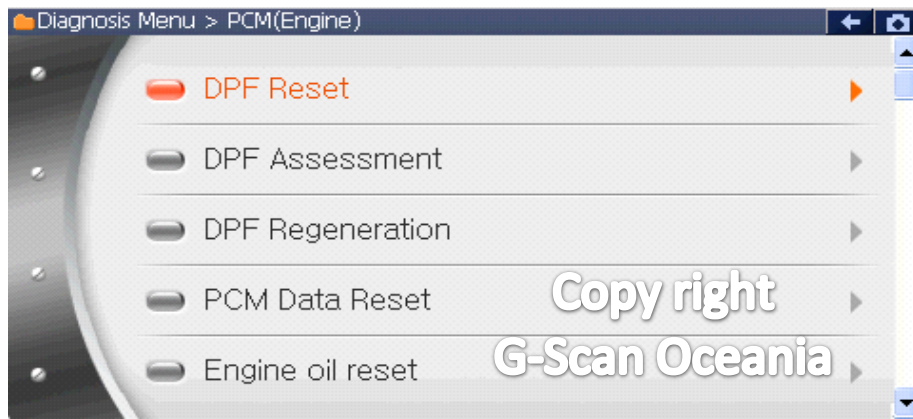


1. Select [DPF reset]

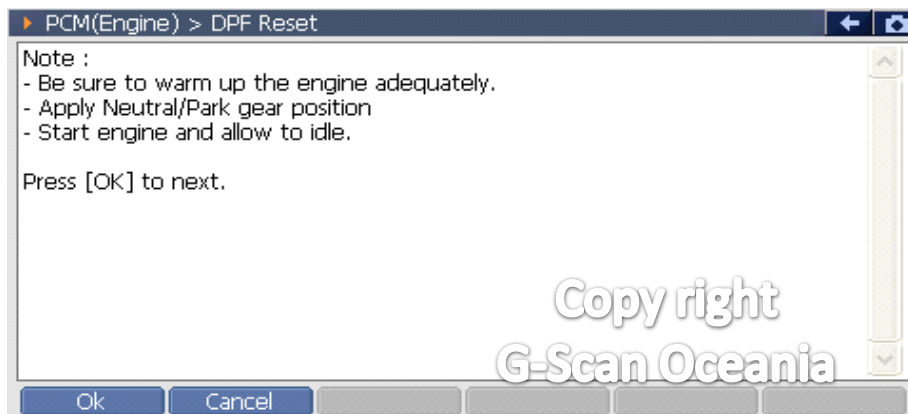


1. Checking the preconditions.



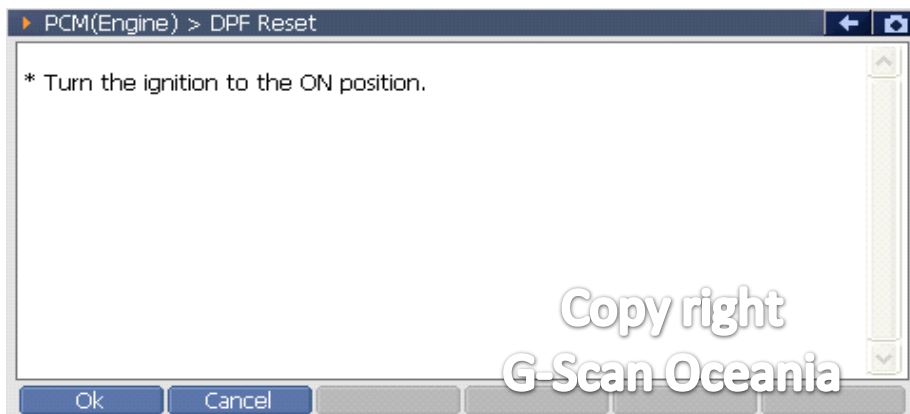

1. After this step. G-scan will check [Intake air temperature].
2. It must be above 15'C.

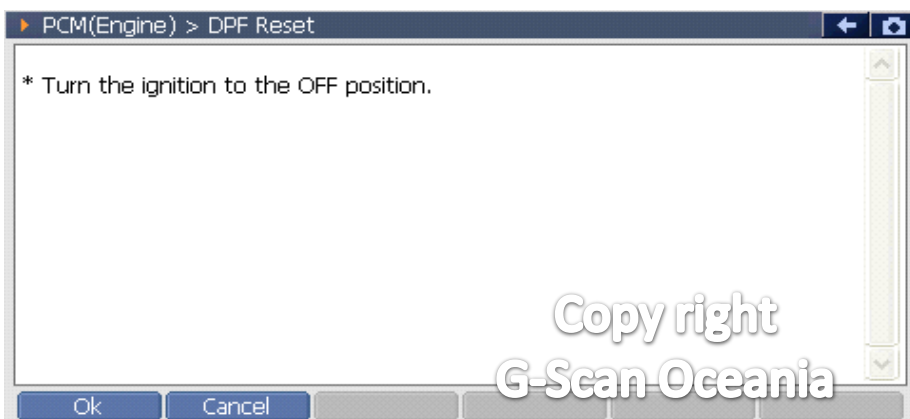

1. After this step. G-scan will take 5 seconds for initialization.

