




1. Select General>ALL>16 pin connector>00->Engine

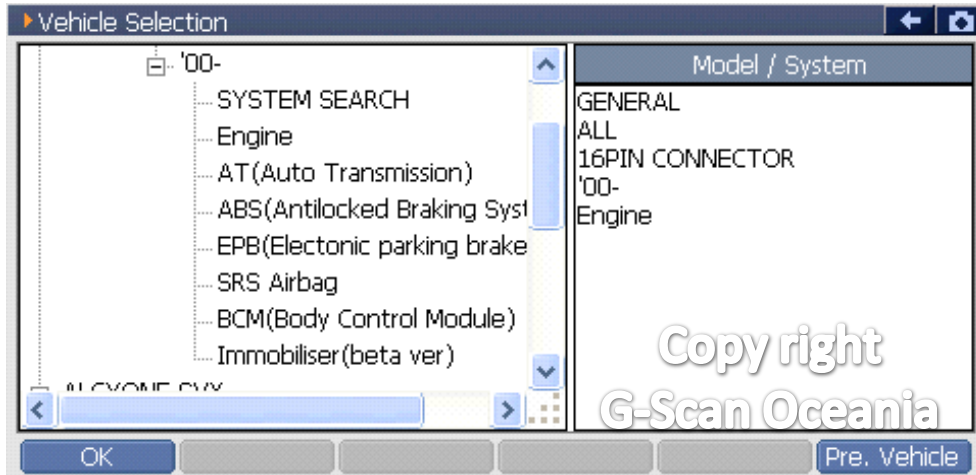


2. Select [Special function]

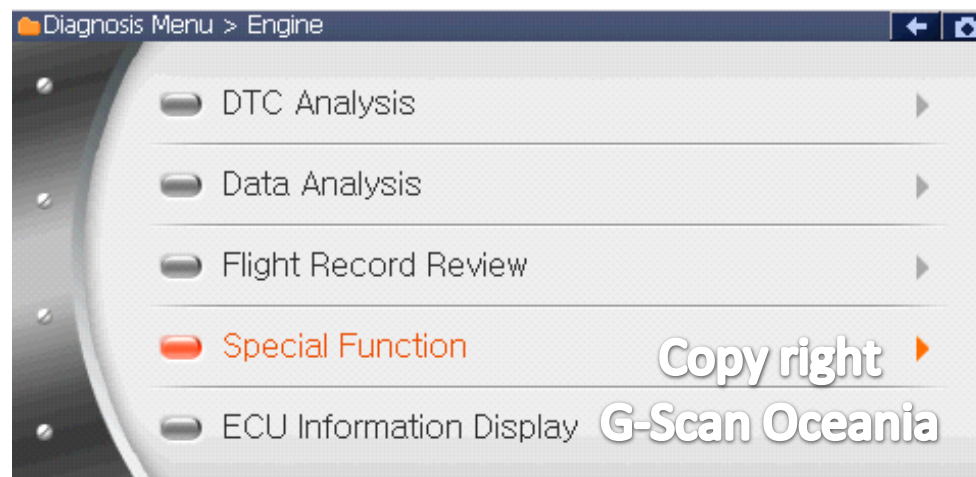

3. Select [Idle adjustment with A/C off]

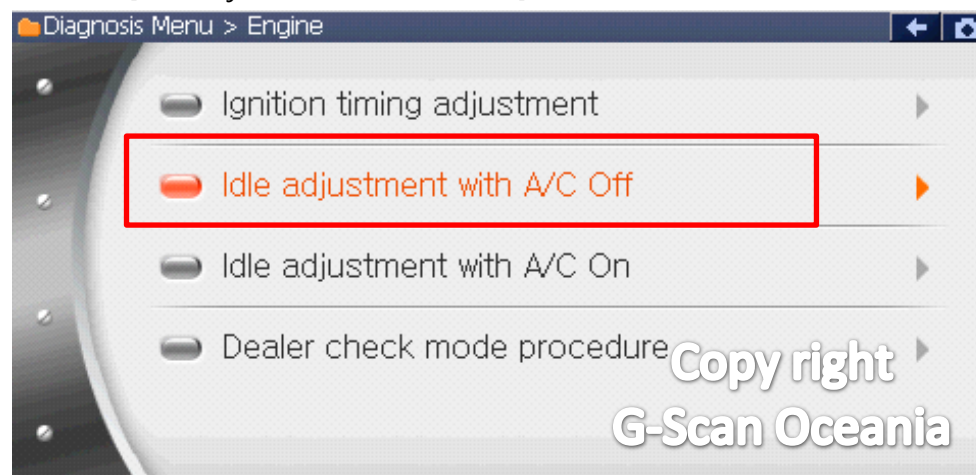


4. Warning message

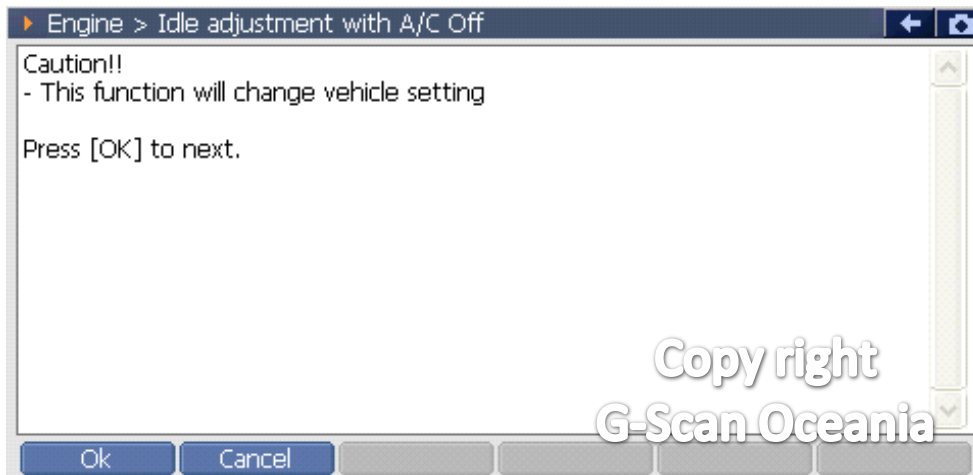


- G-scan will show the setting value already programmed.

5. Setting value#1

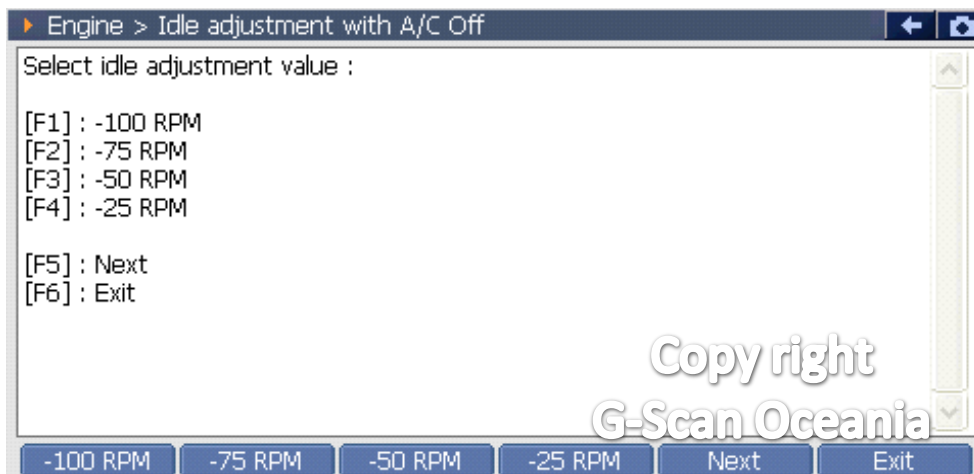

6. Setting value#2

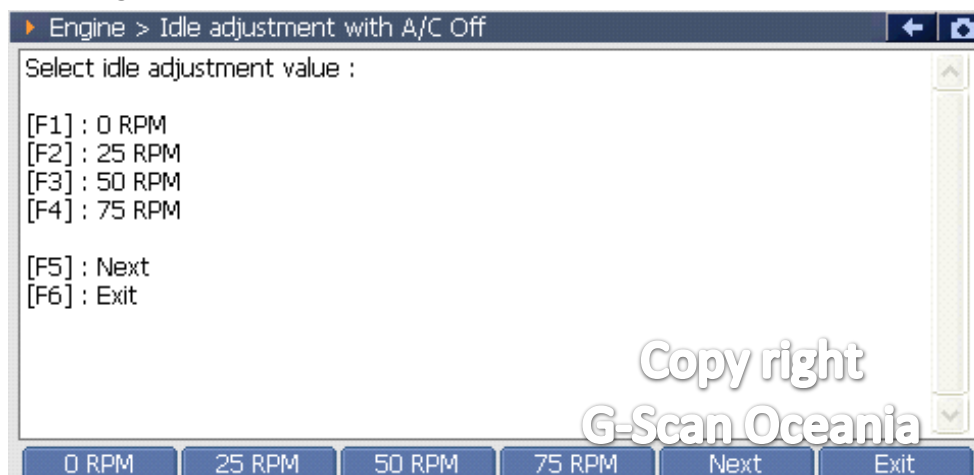

7. Setting value#3

Engine > Idle adjustment with A/C Off

Select idle adjustment value :

[F1] : 100 RPM
[F2] : 125 RPM
[F3] : 150 RPM
[F4] : 175 RPM

[F5] : Next
[F6] : Exit

Copy right
G-Scan Oceania

100 RPM 125 RPM 150 RPM 175 RPM Next Exit

8. Setting value#4

Engine > Idle adjustment with A/C Off

Select idle adjustment value :

[F1] : 200 RPM
[F2] : 225 RPM
[F3] : 250 RPM
[F4] : 275 RPM

[F5] : Next
[F6] : Exit

Copy right
G-Scan Oceania

200 RPM 225 RPM 250 RPM 275 RPM Next Exit

9. Setting value#5

Engine > Idle adjustment with A/C Off

Select idle adjustment value :

[F1] : 300 RPM

[F5] : Next
[F6] : Exit

Copy right
G-Scan Oceania

300 RPM Next Exit 275 RPM Next Exit