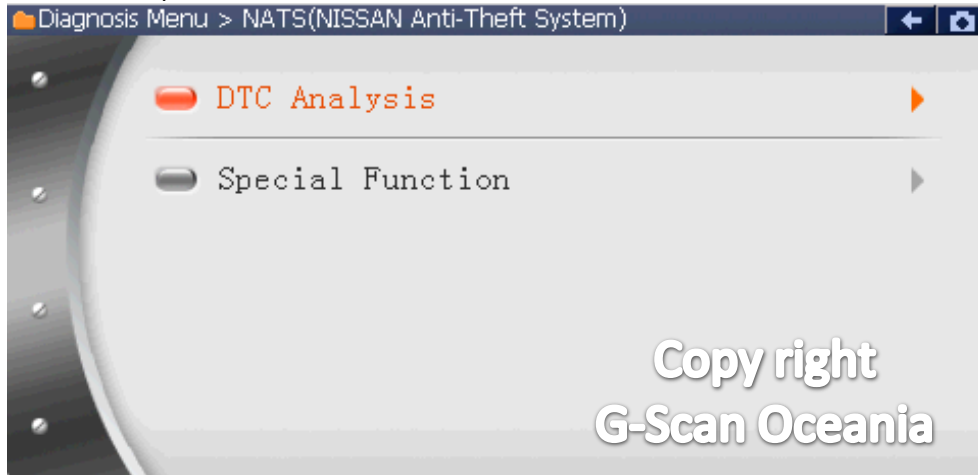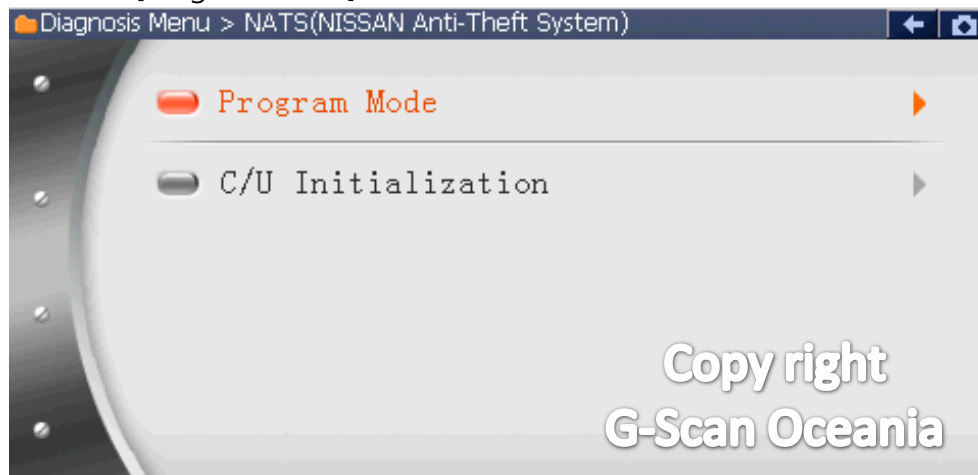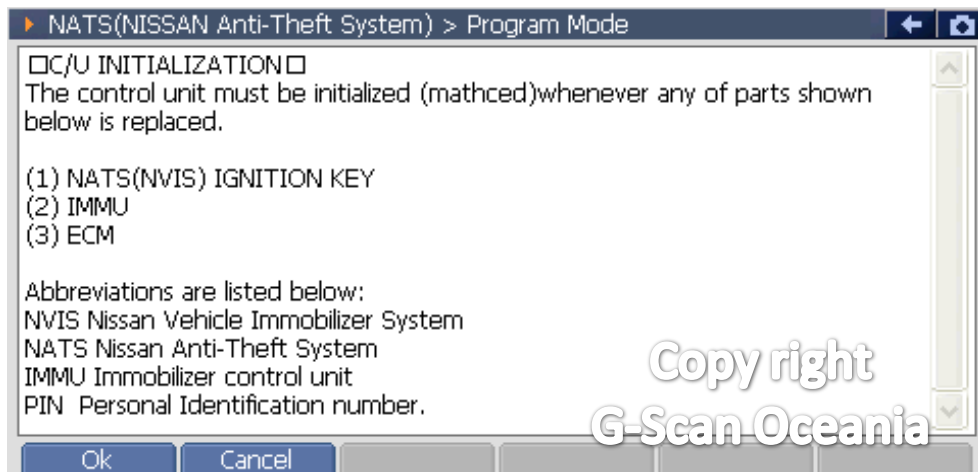1. Select [Special Function]
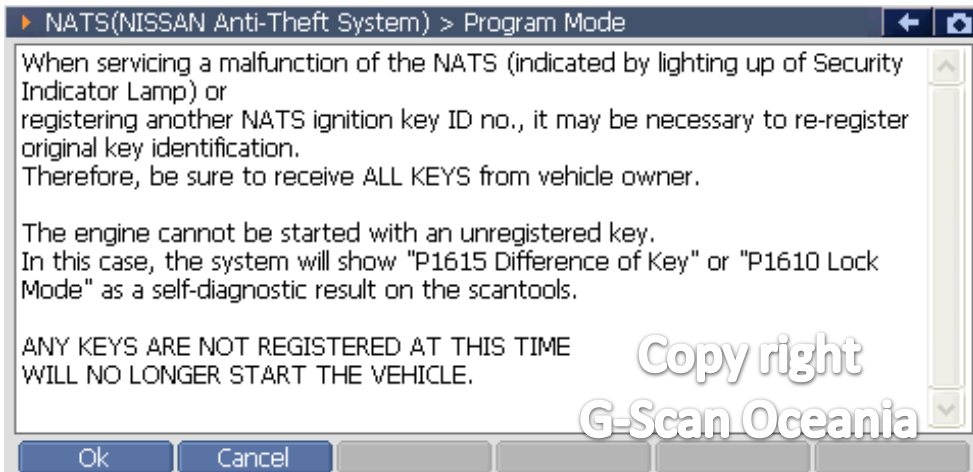

2. Select [Program Mode]

3. Notice

4. Notice
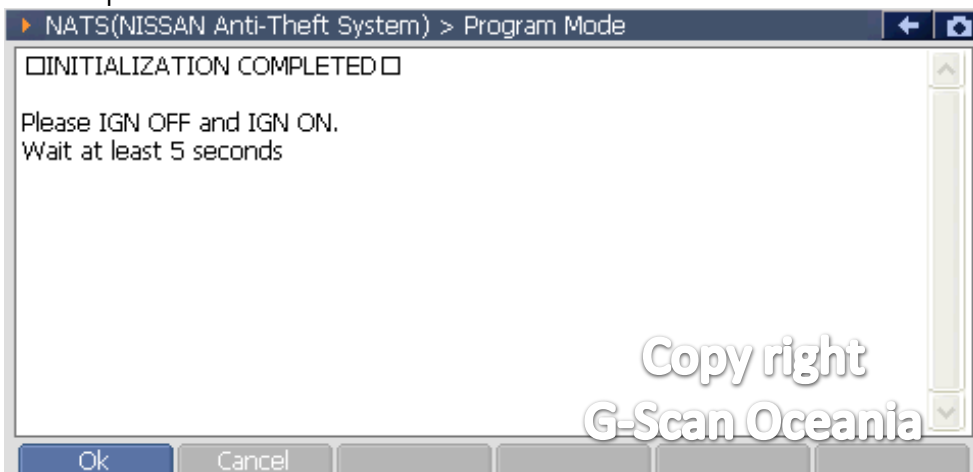
NATS(NISSAN Anti-Theft System) > Program Mode

When servicing a malfunction of the NATS (indicated by lighting up of Security Indicator Lamp) or
registering another NATS ignition key ID no., it may be necessary to re-register original key identification.
Therefore, be sure to receive ALL KEYS from vehicle owner.

The engine cannot be started with an unregistered key.
In this case, the system will show "P1615 Difference of Key" or "P1610 Lock Mode" as a self-diagnostic result on the scantools.

ANY KEYS ARE NOT REGISTERED AT THIS TIME
WILL NO LONGER START THE VEHICLE.

Ok   Cancel

5. Input [PIN CODE]

NATS(NISSAN Anti-Theft System) > Program Mode

□INPUT PIN CODE□

Model years 1999 ~ 2004
TYPE A : enter PIN 5523 or 9589

Model years after 2004
TYPE B : enter security PIN code.

Check the vehicle's model year.
Please input the 4-digit PIN code number.

1	2	3
4	5	6
7	8	9
<-	0	Enter

Ok   Cancel

6. Complete

NATS(NISSAN Anti-Theft System) > Program Mode

□INITIALIZATION COMPLETED□

Please IGN OFF and IGN ON.
Wait at least 5 seconds

Ok   Cancel

7. Confirm more additional keys